


www.aggretech.co

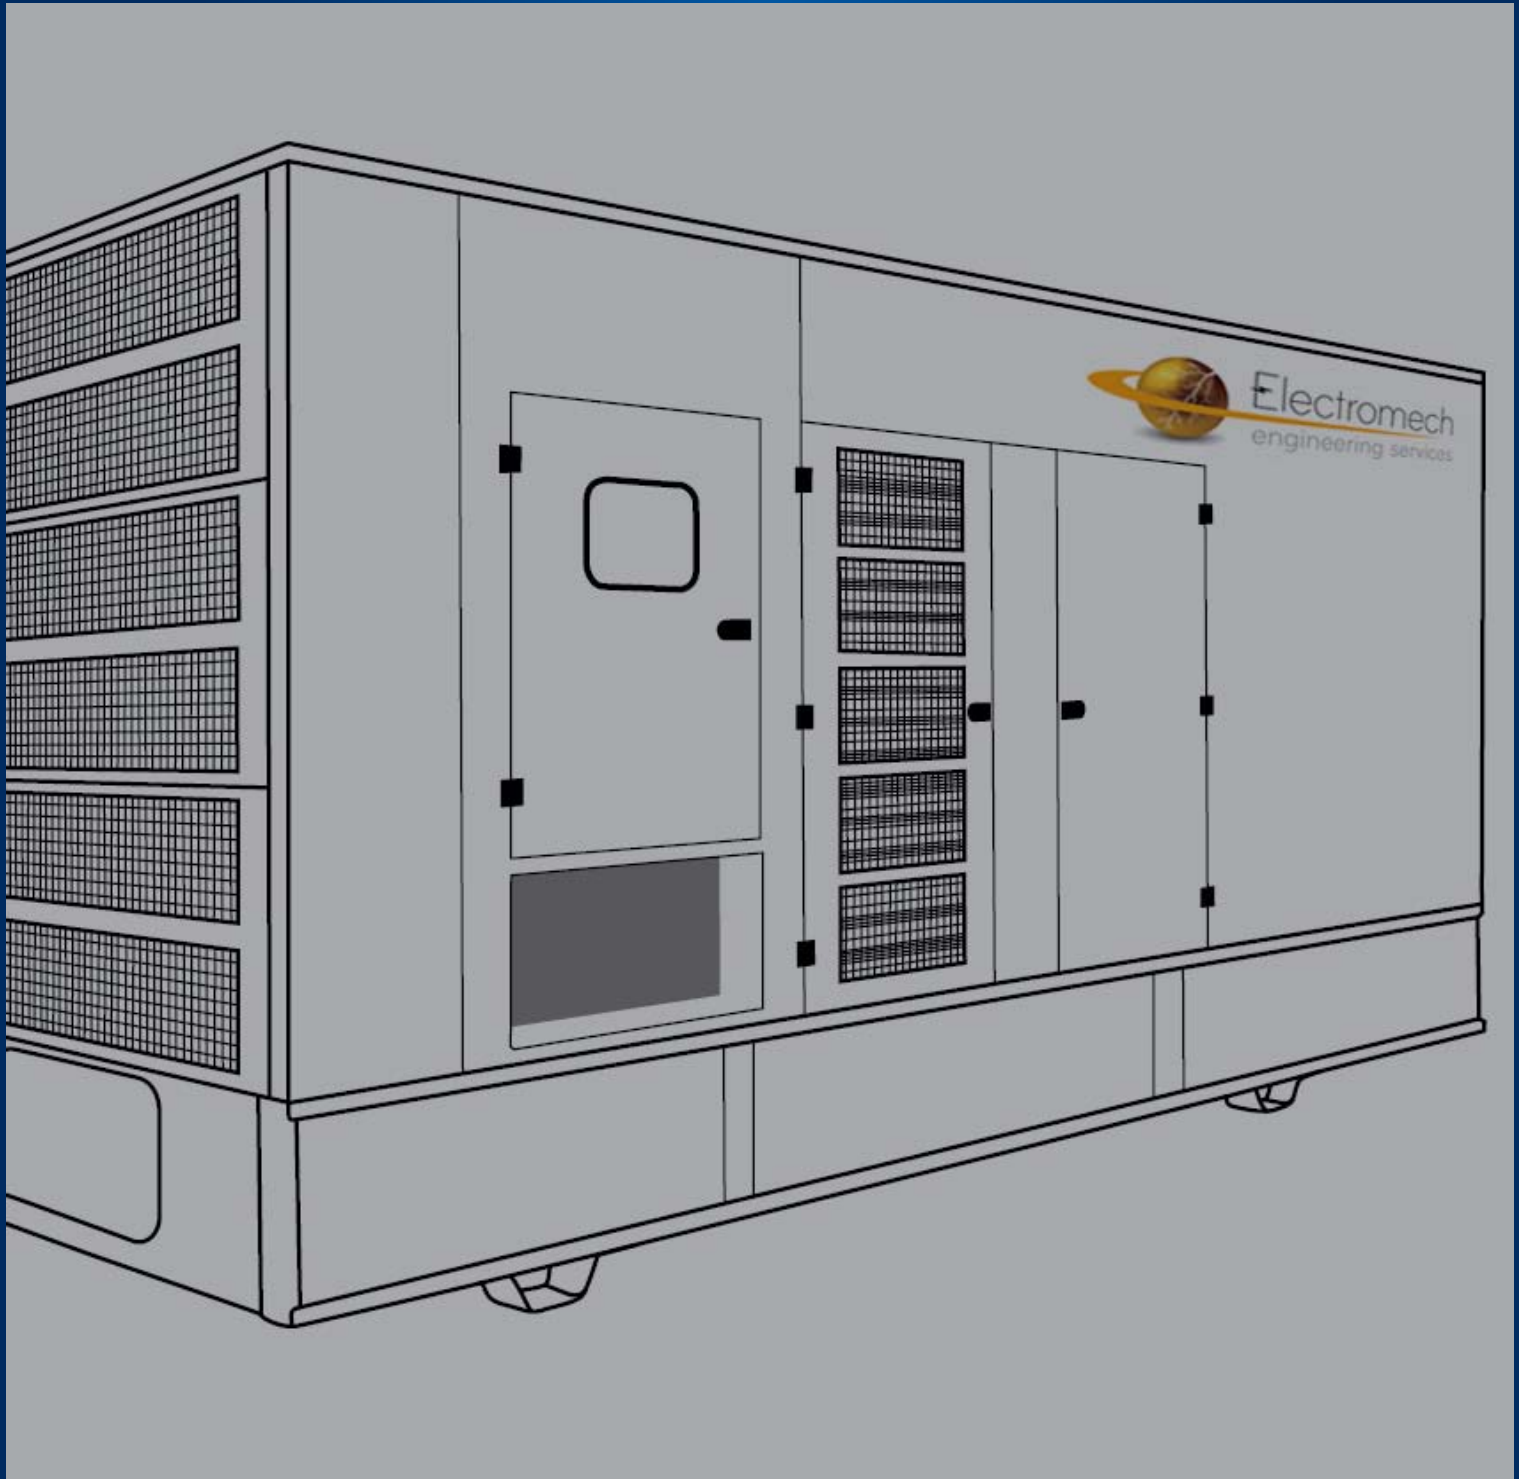

Type

AGS0390D

DIESEL GENERATOR SET


370/410 kVA

Machine Set

Diesel Generating Set

Type AGS0390D

370/410 kVA

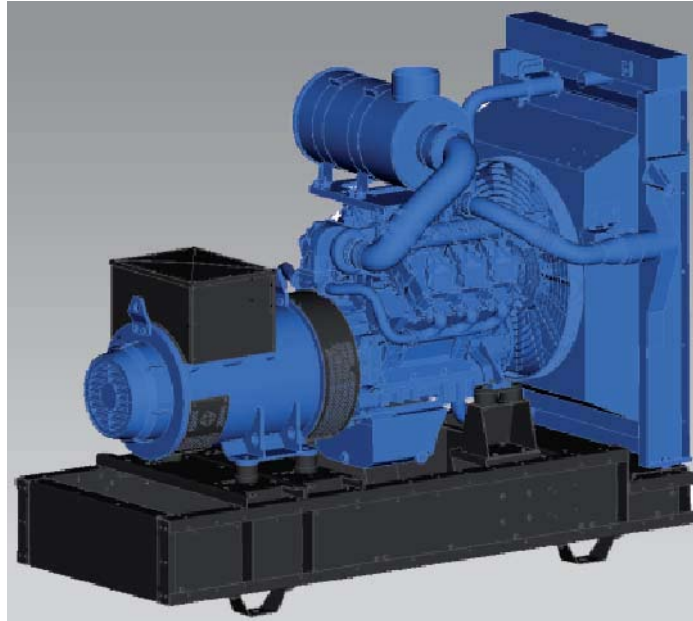

Torsion-free base frame made of laser-cut, welded tilted steel profiles; machine group is mounted on base frame with rubber buffers which allow the machine group to vibrate; however, there is no transfer of vibration to frame; base frame with pallet feet can be carried with the truck or fork lift; engine and alternator are connected with steel flange coupling;

Genset Data

Variable continuous power (CRP)	370 kVA
Emergency power (ERP)	410 kVA
Power factor (cos phi)	0.8
Nominal voltage	400 V / 230 V
Nominal current	536 A
Frequency	50 Hz
Speed	1 500 min
Load acceptance	65 %

Fuel System⁴

Fuel consumption at	
100 % load	86.6 l/h
75 % load	62.5 l/h
50 % load	41.9 l/h
25 % load	21.9 l/h
Specific fuel consumption at	
100 % load	214 g/kWh
75 % load	206 g/kWh
50 % load	207 g/kWh
25 % load	216 g/kWh
Fuel tank capacity (Open Set)	400 l
Fuel tank capacity (Sound Proof)	900 l
Autonomy at full load (Open Set)	4.6 h
Autonomy at full load (Sound Proof)	10.4 h

Dimensions and Weights

Open Set	
Length	2 800 mm
Width	1 378 mm
Height	2 217 mm
Weight	2 600 kg
Sound Proof	
Length	4 180 mm
Width	1 580 mm
Height	2 470 mm
Weight	4 100 kg

Noise Emission⁵

Sound pressure L_{PA} @ 1m (Open Set)	101 dB(A)
Sound pressure L_{PA} @ 7m (Sound Proof)	approx. 70 dB(A)

Engine Data

Manufacturer	Deutz
Type	BF6M 1015 CP
Configuration	4 cycle; V; 6 cylinder Diesel
Aspiration	turbo charged with charge air cooler
Displacement	11.9 l
Gross output - Prime power (PRP)	338.0 kW
Gross output - Emergency power (LTP)	365.0 kW
Compression ratio	16.5:1
Governor type	electronic
Governing standards	G3
Oil capacity (sump)	34 l
Oil consumption	0.3 % of fuel consumption
Starting voltage	12 V
Exhaust emission standard	TA Luft 2000

Combustion Air

Combustion air volume	1 478 m ³ /h
Air cleaner type	dry; replaceable element with safety cartridge

Exhaust System

Max. exhaust gas temperature	555 °C
Max. exhaust back pressure	50 mbar
Exhaust gas flow	4 272 m ³ /h

Legend:

¹ PRP (Prime Power) is available at a variable load for unlimited hours. Adjustable permanent output 100 %, no time restrictions. Prime Power is in accordance with ISO 8528. A 10 % overload capacity is available for limited time in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

² LTP (Limited Time Power) is applicable for supplying power to a constant electrical load for limited hours in the event of a main power network failure. No overload is permitted. LTP is in accordance with ISO 8528.

³ max. additional output in kVA (PRP).

⁴ Fuel consumption according to Deutz datasheet as shown on www.deutz.com

⁵ at 75 % load, according to EU directive 2000/14/EG the PRP and LTP power ratings

Alternator Data

Manufacturer	Aggretech
Type	ACG0375-4-400
Mechanical protection (IP class)	IP 23
Insulation class	H
Excitation	brushless, self-exciting synchronous alternator
Voltage control	electronic, self-regulating +/- 1 %
Short circuit capability	3x nominal current
AC wavefactor total harmonic distortion	< 2 %
Radio interference	EN 55011 Class B, Group 1
Efficiency (cos phi 0,8 / 400V) at	
100 % load	93.4 %
75 % load	93.3 %
50 % load	92.2 %
Cooling air volume	3 288 m ³ /h

Cooling System

Standard of cooling system	water cooled
Fan power consumption	10.7 kW
Cooling air flow	24 120 m ³ /h
Air pressure loss	1.5 mbar

Powered by







Quality standards:

VDE 0530, DIN 6280, ISO 8528, IEC 34, BS 4999, BS 5000, BS 5514; We are certified specialist according to §19 I WHG.

All performance figures are to be understood for ambient conditions as follows: ambient temperature 25 °C, 100 m above sea level, rel. humidity 30 %.

We reserve the right to change specifications without notice.

Diesel Generating Set Type AGS0390D 370/410 kVA

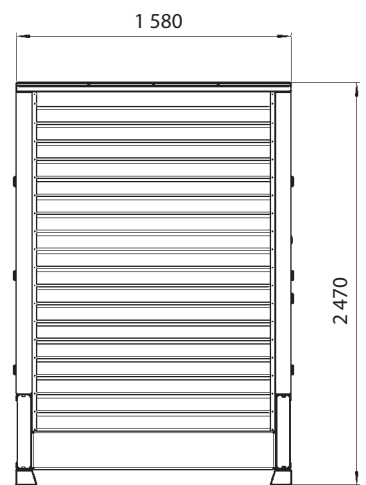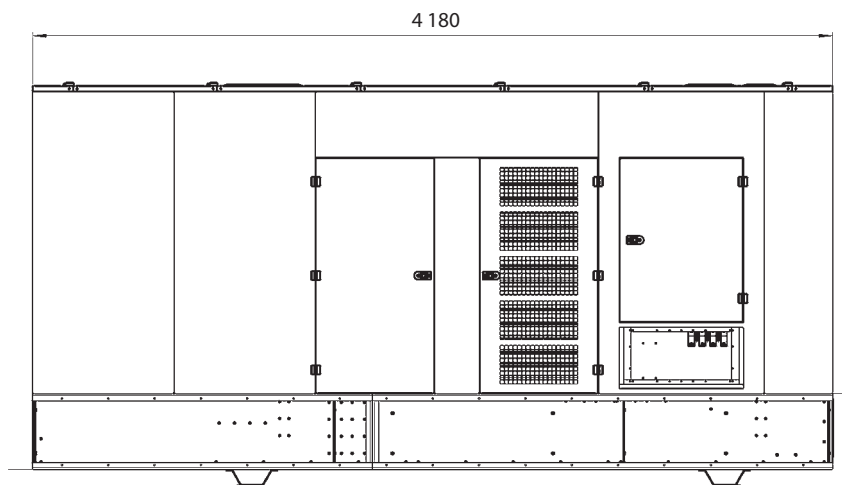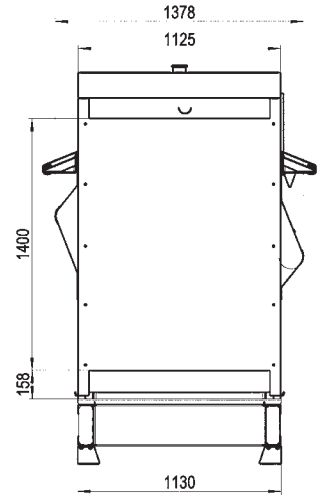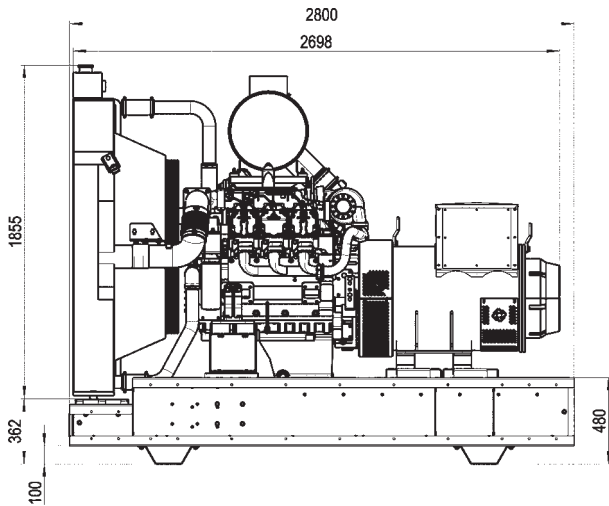

Your authorised dealer

Drawings are not true to scale.

Weights refer to the dry weights and represent a set with standard features. Accessories and loose parts are not accounted. Drawings are for illustrative purposes only and might include special accessories.

We reserve the right to change specifications without notice.

A 2 / AGS0390D – 31/05/2010 – E

Electromech Engineering Ltd.
Electromech House
Unit 7 Otterswood Square
Martland Mill Industrial Estate
WIGAN
Lancashire
WN5 0LF

Telephone: 01942 226322
Fax: 01942 226307
email: sales@electromech.org

